




STUDENT STEEL BRIDGE COMPETITION

2013 RULES

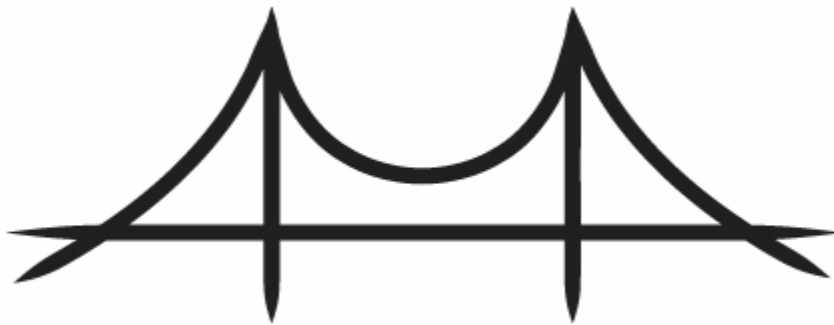

MISSION

The mission of the Student Steel Bridge Competition (SSBC) is to supplement the education of civil engineering students with a comprehensive, student-driven project experience from conception and design through fabrication, erection, and testing, culminating in a steel structure that meets client specifications and optimizes performance and economy. The SSBC increases awareness of real-world engineering issues such as spatial constraints, material properties, strength, serviceability, fabrication and erection processes, safety, aesthetics, project management, and cost. Success in inter-collegiate competition requires application of engineering principles and theory, and effective teamwork. Future engineers are stimulated to innovate, practice professionalism, and use structural steel efficiently.

WELCOME

ASCE and AISC support and encourage the equitable opportunity for participation by all interested and eligible individuals in the Student Steel Bridge Competition without regard to race, ethnicity, religion, age, gender, sexual orientation, nationality, or physical challenges. Bridge teams should be inclusive and open and fair to all interested and eligible participants.

SPONSORS

Organizing sponsors of the Student Steel Bridge Competition are

- American Institute of Steel Construction (AISC)
- American Society of Civil Engineers (ASCE)

Co-sponsors are

- American Iron and Steel Institute (AISI)
- Bentley Systems, Inc.
- Canadian Institute of Steel Construction (CISC)
- DS SolidWorks Corp.
- James F. Lincoln Arc Welding Foundation
- National Steel Bridge Alliance (NSBA)
- Nelson Stud Welding
- Nucor Corporation
- Steel Structures Education Foundation (SSEF)

TABLE OF CONTENTS

	<u>page</u>
1. Introduction	4
2. Executive Summary	5
3. Problem Statement	6
4. Eligibility	7
5. Rule Changes	9
6. Safety	9
7. Scoring	10
8. Schedule of Competition	13
9. Dimension and Support Specifications	14
10. Material and Component Specifications	17
11. Construction Regulations	18
12. Load Tests	25
13. Equipment Provided by Host	32
14. Interpretation of Rules	34
15. Judging	34
16. Appeals	34
17. Index of Definitions	37
APPENDIX	
Site and Bridge Diagram	38
Lateral Loading Diagram	39
Vertical Loading Diagram	40

Any revisions to the rules in this document are incorporated in clarifications that are published at the bridge competition web site, <http://www.aisc.org/steelbridge>. Revisions and clarifications do not appear in this document but are considered formal addenda to the Rules.

Section 1

INTRODUCTION

Students design and erect a steel bridge by themselves but may seek advice from faculty and student organization advisers. Students gain maximum benefit if they fabricate the entire bridge themselves. However, because appropriate shop facilities and supervision are not available at all universities, students may use the services of a commercial fabricator provided that they develop the work orders and shop drawings, and observe the operations. Students are encouraged to maximize their involvement in fabrication.

Safety is of primary importance. AISC and ASCE request that competitors, advisers, hosts, and judges take all necessary precautions to prevent injury to competitors, judges, host personnel, and spectators.

This document describes the competition and states the rules for competitions conducted during 2013 at both conference and national levels. It is available at <http://www.aisc.org/steelbridge>, together with revisions, clarifications, other information, and the form for submitting requests for clarifications. Information at this site takes priority over any other source except as noted herein.

The rules are changed every year to enhance the competition and ensure that competitors design and build new bridges. The rules are intended to be prescriptive but may require some interpretation. The procedure for requesting clarification of the rules is described in section 14, "Interpretation of Rules."

Competitors, judges, and host personnel are encouraged to read this Rules document thoroughly from beginning to end and then review the Competition Guide at <http://www.nssbc.info>. That site also is the source of the official scoring spreadsheet which generates forms for recording data. Judges should be familiar with these forms prior to the competition.

Members of the Student Steel Bridge Rules Committee are

- Michael F. Engestrom, Technical Marketing Director, Nucor-Yamato Steel
- Nancy Gavlin, S.E., P.E., Director of Education, AISC
- Jennifer Greer-Steele, ASCE Committee on Student Activities
Corresponding Member
- Frank J. Hatfield, P.E., Professor Emeritus, Michigan State University
- John M. Parucki, Structural Steel Consultant
- Brian Raff, Marketing Director, NSBA
- Don Sepulveda, P.E., Executive Officer, Regional Rail, Los Angeles
County Metropolitan Transportation Authority
- Ping Wei, Director of Educational Activities, ASCE
- James C. Williams, P.E., Professor, University of Texas at Arlington

Section 2

EXECUTIVE SUMMARY

Civil Engineering students are challenged to an inter-collegiate competition that includes design, fabrication, and construction of a scaled steel bridge. Participating students apply engineering principles and theory, and gain practical experience in structural design, fabrication processes, construction planning, organization, project management, and teamwork.

The rules of the competition simulate a request for proposal that requires a scaled model to demonstrate the efficacy of competing designs. Section 3, "Problem Statement," relates the rules to realistic challenges encountered in bridge design and construction.

Standards for strength, durability, constructability, usability, functionality, and safety reflect the volumes of requirements that govern the design and construction of full-scale bridges. Criteria for excellence are represented by the award categories of stiffness, lightness, construction speed, display, efficiency, and economy. Competition judges and the Rules Committee take the role of the owner and have the authority to accept and reject entries.

The safety of competitors, judges, host personnel, and spectators is paramount. Risky procedures are prohibited. Load testing is stopped if sway or deflection exceeds specified limits, or if collapse is deemed imminent in the opinion of the judges. Bridges that cannot be constructed and loaded safely are withdrawn from competition. In addition, the rules identify and penalize construction errors that represent accidents in full-scale construction.

The rules of the competition accommodate a variety of designs and allow innovation. Designers must consider carefully the comparative advantages of various alternatives. For example, a truss bridge may be stiffer than a girder bridge but slower to construct. Successful teams analyze and compare alternative designs prior to fabrication using value analysis based on scoring criteria.

The Student Steel Bridge Competition provides design and construction planning experience, an opportunity to learn fabrication procedures, and the excitement of networking with and competing against students from other colleges and universities.

Section 3

PROBLEM STATEMENT

The new Hill Music Hall and Marian Paroo Memorial Library sparked revitalization of the River City waterfront, with restaurants, theaters, and luxury condominiums scrambling for space in the old brick warehouses. The resulting vehicle traffic now exceeds the capacity of city streets. Therefore, the River City Development Corporation (RCDC) is requesting design/build proposals for a bridge to provide direct access from suburbs across the river.

Accelerated Bridge Construction (ABC) is mandated in order to minimize travel delays and financial losses to waterfront businesses caused by disruption of traffic during construction. As an attractive signature structure for the redeveloped waterfront, the new bridge will provide clearance for tour boats, and will cantilever over the historically significant billiard parlor.

RCDC specifies steel because fast erection is essential to ABC, and because steel's durability and high level of recycled content contribute to exceptional sustainability. The high strength to weight ratio of steel assures an efficient structure, and prefabricated deck panels expedite ABC.

The congested urban site restricts location and size of the staging area, and the dimensions and weight of equipment and transported material are limited by narrow, thinly paved streets. Navigation must not be restricted by construction barges or permanent abutments in the river. However, a permit has been obtained for a temporary cofferdam. The scope of the bridge contract does not include foundations, approaches, deck panels, or the cofferdam.

Your company's proposal is among those that the RCDC has deemed responsive, and winning the contract would be a step toward leadership in ABC. Each competing firm is requested to submit a 1:10 scale model to demonstrate its concept. Models will be erected under simulated field conditions and will be tested for stability, strength, and serviceability using standardized lateral and vertical loads. The RCDC has selected a panel of engineers to judge the models by multiple criteria including durability, constructability, usability, stiffness, construction speed, efficiency, economy, and attractiveness. The contract will be awarded to the company whose model satisfies specified requirements and best achieves project objectives. Any attempt to gain advantage by circumventing the intent of the competition as expressed by the Rules, including this Problem Statement, will be grounds for rejecting the model and terminating the company's eligibility.

Section 4

ELIGIBILITY

4.1 LEVELS OF COMPETITIONS

There are two levels of competition: conference and national. Conference competitions are held in conjunction with ASCE annual student conferences. Outstanding performance in conference competitions qualifies eligible teams for the national competition.

4.2 CONFERENCE COMPETITIONS

4.2.1 Only one bridge per college or university may compete in an ASCE student conference, and a college or university may compete in only one ASCE student conference.

4.2.2 The ASCE student organization that is hosting a conference may invite guest teams, which are teams from colleges or universities that do not have ASCE student organizations, or from official ASCE student organizations that are assigned to different conferences. Conference assignments are listed in the ASCE Official Register.

4.2.3 A team shall consist only of undergraduate and graduate students in good standing with their ASCE student organization. This requirement is waived for guest teams.

4.2.4 The official scoring spreadsheet shall be used, and all teams (including guest teams) shall be listed on that spreadsheet. The official scoring spreadsheet may be downloaded from <http://www.nssbc.info>.

4.2.5 The host student organization shall promptly submit the completed official scoring spreadsheet for a conference competition to ssbc.results@gmail.com. Teams from that conference will not be invited to the National Student Steel Bridge Competition (NSSBC) until the spreadsheet is received.

4.3. NATIONAL COMPETITION

4.3.1 A team is not eligible to be invited to compete in the NSSBC if it is

- (1) a guest team as defined in 4.2.2, or
- (2) from an organization that is not in good standing with ASCE, or
- (3) from an organization that has not satisfied ASCE requirements regarding participation in its conference, or
- (4) ruled to be ineligible to complete its conference competition.

ASCE requirements for good standing and for conference participation are reprinted in 4.4 but are subject to change.

4.3.2 The maximum number of eligible teams from a conference that will be invited to compete in the NSSBC is based on the number of teams at that conference that competed (that is, presented bridges and staged them for timed construction) but not including guest teams as defined in 4.2.2.

- (1) Only the single best scoring eligible team will be invited from a conference in which two, three or four non-guest teams competed.
- (2) The two top scoring eligible teams will be invited from a conference in which five to ten non-guest teams competed.
- (3) The three top scoring eligible teams will be invited from a conference in which eleven or more non-guest teams competed.

4.3.3 Teams are not invited to compete in the NSSBC as guests.

4.3.4 Only one bridge per college or university may be entered in the NSSBC.

4.3.5 A team must consist only of members who are or were students in good standing with their ASCE student organization during all or part of the academic year leading up to the NSSBC.

4.4 ASCE NATIONAL COMPETITION ELIGIBILITY REQUIREMENTS

ASCE requirements for good standing and for conference participation, as they existed in July, 2012, are reprinted in this sub-section (4.4) but are subject to change. The current version is at <http://www.asce.org/studentorgs/competition-eligibility/>. ASCE has sole authority for determining and enforcing these requirements; questions should be sent by e-mail to student@asce.org.

“In order to facilitate broader participation by ASCE Student Organizations in Student Conference activities, the ASCE Committee on Student Activities (CSA) stresses the importance of the conference as an event that is much more than a qualifying round for national competitions and highlights the required events at a conference. As such, the following qualifications are required of all ASCE Student Organizations in order to participate in an ASCE-sponsored National Competition.

An ASCE Student Organization must:

- Be in good standing with ASCE (annual report and annual dues submitted and received by ASCE prior to the start of the Student Conference).

- Attend and participate in their assigned Student Conference as shown through their school's:
 - a) Good faith participation in the Student Conference Business Meeting (i.e. on time attendance by at least one student representative);
 - b) Good faith participation in the Student Conference Paper Competition (i.e. submission and presentation by at least one member of the ASCE Student Organization); and
 - c) Meeting any additional requirements of Student Conference participation set by the Student Conference at the previous year's business meeting or in their written and approved by-laws, standing rules, or constitution.

Note: *The concrete canoe design paper/oral presentation does not count as an entry into the Student Conference Paper Competition.”*

Section 5

RULE CHANGES

The following items in this section (5) identify some of the major changes from the 2012 rules. Not all changes are included. Contestants, hosts, and judges are cautioned to **read this entire document carefully and disregard rules and clarifications from previous years.**

- (1) Scoring and penalties have been revised.
- (2) Bridge and site dimensions are different.
- (3) Interlocking connections that were acceptable last year, such as typical dovetails, tees, and those that lock by twisting, will be penalized this year.
- (4) Responsibilities are assigned to team captains.
- (5) Bridges that collapse or deflect excessively will be withdrawn from competition.

Section 6

SAFETY

Safety has the highest priority – risk of personal injury will not be tolerated. Sub-sections 9.2, 10.1, 11.2, and 11.3 of these Rules identify hazardous conditions and actions that will result in withdrawing a bridge from competition if not corrected. Judges will document these safety violations by checking appropriate boxes on the data entry forms. Judges also must comply with and enforce the safety regulations for load testing in sub-sections 12.1, 12.2, and 12.3. Sub-sections 12.4, 12.5, and 12.6 specify penalties for bridges that exhibit unsafe characteristics during load testing.

Judges are empowered to halt any activity that they deem to be hazardous. If a bridge cannot compete safely, it must be withdrawn from competition. If the problem is not anticipated by the sub-sections listed in the preceding paragraph, the judge should write a brief description of the problem on the data form.

Section 7

SCORING

7.1 RECORDING DATA AND SUBMITTING SCORES

Scoring data should be recorded for every team that competes, using judges' data forms printed from the official scoring spreadsheet downloaded from <http://www.nssbc.info>. Data from those forms are then entered on the spreadsheet. After all scoring information has been collected for a team, the scoring official reviews data entry with the captain of that team. The team captain is given adequate time to verify the data before signing the form.

The completed official scoring spreadsheet for a conference competition shall be submitted to ssbc.results@gmail.com by the host student organization. Conference results are not final until the spreadsheet is submitted. Questions and comments regarding the spreadsheet should be sent to ssbc.results@gmail.com.

Judges' data forms shall be retained by the host student organization for two weeks after the competition.

7.2 CATEGORIES OF COMPETITION

7.2.1 Categories of competition are display, construction speed, lightness, stiffness, construction economy, and structural efficiency. In addition, overall performance is rated.

7.2.2 Display

7.2.2.1 Display is the tie-breaker for all categories of competition. Judges shall not declare ties in display. The bridge is displayed exactly as it will be erected during timed construction. Display is judged by the following criteria

7.2.2.2 Appearance of bridge, including balance, proportion, elegance, and finish. Quality of fabrication, including welding, shall not be considered because some bridges may be fabricated professionally rather than by students.

7.2.2.3 Permanent identification of the bridge consisting of the name of the college or university exactly as shown on the ASCE student web site, <http://www.asce.org/Content.aspx?id=14843>. The name must appear on member(s) of the bridge in letters that are all, by measurement, at least one inch high, and must be formed from steel or applied to steel with paint or decals. A bridge that lacks appropriate identification will receive a very low display rating.

7.2.2.4 Poster describing design. The poster must

- (1) be flat with maximum dimensions of two by three feet and must present all information on one side without attached pages that must be lifted or turned,
- (2) identify the college or university with the same name that appears on the bridge,
- (3) be illustrated with a scaled, dimensioned side view of the bridge,
- (4) present a brief explanation of why the overall configuration of the bridge was selected,
- (5) include a brief computation demonstrating design for one limit state,
- (6) discuss provisions for sustainability, if any, for example, by listing or designating on the drawing those parts of the bridge that were salvaged from previous bridges or projects, or obtained from salvage yards,
- (7) acknowledge university technicians, faculty, and others who helped fabricate the bridge or provided advice, and
- (8) be in English.

Additional information may be included. Names of financial sponsors may be shown on the poster or on an optional second poster that could accommodate their logos. Electronic displays, decorated supports, lights, and sound are not permitted and will result in the worst possible rating for the poster. A very low rating will be imposed if there is no poster or if it is grossly inadequate. The poster is not part of the bridge but must be in place whenever the bridge is on display.

If English is not the dominant language where the competition is conducted, an optional additional poster may be displayed that is a translation into the local language of the required English language design poster.

7.2.3 Construction Speed

The bridge with the lowest total time will win in the construction speed category. Total time is the time required for construction modified by construction penalties prescribed in 11.4 and 11.8.1, plus two minutes if repair time is commenced, plus double the repair time modified by construction penalties prescribed in 11.4 (see 11.10.1). There are upper limits on construction and repair time (see 11.8.2 and 11.10.2).

7.2.4 Lightness

The bridge with the least total weight will win in the lightness category. Total weight is the weight of the bridge (determined by scales provided by the host student organization) plus weight penalties prescribed in 9.3, 9.4, and 10.2. Decking, tools, temporary pier, lateral restraint devices, and posters are not included in total weight.

7.2.5 Stiffness

The bridge with the lowest aggregate deflection will win in the stiffness category. Aggregate deflection is determined from measurements as prescribed in 12.5.

7.2.6 Construction Economy

The bridge with the lowest construction cost (C_c) will win in the construction economy category. Construction cost is computed as

$$C_c = \text{Total time (minutes)} \times \text{number of builders} \times 50,000 \text{ (\$/builder-minute)} \\ + \text{load test penalties (\$)}.$$

Total time is defined in 7.2.3, and load test time penalties are prescribed in 12.2, 12.4, and 12.5. The number of builders includes all members and associates of the competing organization who physically assist the team at any time during timed construction or repair. A captain who is not a builder and does not physically assist with construction or repair is not included in number of builders.

7.2.7 Structural Efficiency

The bridge with the lowest structural cost (C_s) will win in the structural efficiency category. Structural cost is computed as

For a bridge that weighs 400 pounds or less,

$$C_s = \text{Total weight (pounds)} \times 10,000 \text{ (\$/pound)} \\ + \text{Aggregate deflection (inches)} \times 1,000,000 \text{ (\$/inch)} \\ + \text{Load test penalties (\$)}$$

For a bridge that weighs more than 400 pounds,

$$C_s = [\text{Total weight (pounds)}]^2 \times 25 \text{ (\$/pound}^2\text{)} \\ + \text{Aggregate deflection (inches)} \times 1,000,000 \text{ (\$/inch)} \\ + \text{Load test penalties (\$)}$$

Total weight is defined in 7.2.4, aggregate deflection is defined in 7.2.5, and load test weight penalties are prescribed in 12.4 and 12.5.

7.2.8 Overall Performance

The overall performance rating of a bridge is the sum of construction cost and structural cost, ($C_c + C_s$). The bridge achieving the lowest value of this total wins the overall competition.

7.3 SPREADSHEET FOR SCORING

The spreadsheet for scoring the competition is also useful for comparing alternatives when designing a bridge. Teams are encouraged to download, understand, and verify the spreadsheet before the competition. It is available in the Competition Guide at <http://www.nssbc.info>. Questions and comments regarding the spreadsheet should be sent to ssbc.results@gmail.com.

Section 8

SCHEDULE OF COMPETITION

In the months before the competition, students design their bridges, fabricate members, test load, practice construction, and select the captain and builders for timed construction. The following events occur during the competition

- (1) Bridges are erected for public viewing and are judged for display. After the start of display judging, bridges must not be altered, modified, or enhanced in any way except for disassembly, timed construction, and repair as described in 11.10.
- (2) Bridges are disassembled.
- (3) In a meeting at which all team captains are present, the head judge clarifies rules and conditions of the competition and answers questions.
- (4) The head judge selects the location of the load on the back span and the locations of two of the three vertical deflection targets. See 12.5.1, the Lateral Loading Diagram, and the Vertical Loading Diagram. Selection is done in the presence of the team captains by rolling a die twice. For each possible result S1 of the first roll, Table 8.1 gives the dimension M for positioning the load on the back span and the dimension TB for placing the vertical deflection target on the back span.

TABLE 8.1 Determination of M and TB from first roll of die

S1	even	odd
M	3'0"	7'0"
TB	4'6"	8'6"

For each possible result S2 of the second roll, Table 8.2 gives the dimension TC for placing a vertical deflection target on the cantilever.

TABLE 8.2 Determination of TC from second roll of die

S2	1	2	3	4	5	6
TC	1'0"	1'3"	1'6"	1'9"	2'0"	2'6"

The same locations will be used for all bridges in the competition.

- (5) Using a random process, the head judge determines the order in which teams will compete.
- (6) Bridge members, fasteners, tools, and the temporary pier are staged for construction and inspected by the judges. See section 10, "Material and Component Specifications," 9.4.5, 9.4.6, 11.2, and 11.6 for details.
- (7) Timed construction and repair. See section 11, "Construction Regulations," for details.
- (8) Judges inspect assembled bridges. For details, see section 9, "Dimension and Support Specifications," (including 9.4.5 and 9.4.6 as they apply to installation of fasteners) and 10.1.3.
- (9) Bridges are weighed (if it is impractical to weigh the entire bridge, its parts may be weighed prior to construction). All bridges must be weighed, including those that are withdrawn from competition.
- (10) Load testing. See section 12, "Load Tests," for details.

- (11) Scores and rankings are determined using the official scoring spreadsheet found at www.nssbc.info.
- (12) The host ASCE student organization submits the completed official scoring spreadsheet by e-mailing it to the address given on that spreadsheet.
- (13) Copies of the summary score sheets are distributed to all teams or posted on the conference host's web site.
- (14) The host student organization retains judges' data forms for two weeks.

The order recommended above may be altered. However, it is essential that

- (1) Bridges are not modified after selection of the load location.
- (2) Bridges are not modified between display judging and timed construction.
- (3) No components or tools are added to or removed from the construction site after staging for inspection.
- (4) Modifications between timed construction and load testing are limited to repairs as described in 11.10 and 12.2. Between repairs and load testing, force shall not be applied to the bridge except as necessary to move it. For example, leaning or sitting on the bridge is not allowed.

Section 9

DIMENSION AND SUPPORT SPECIFICATIONS

9.1 MEASUREMENT

Dimensions and support will be checked with the bridge in its as-built condition after construction and repair are completed, and before the bridge is moved from the construction site or load tested. The bridge must not be modified or distorted from its as-built condition in order to satisfy dimension and support rules. Dimensions will be checked without decking or applied load on the bridge.

9.2 FUNCTIONALITY AND SAFETY

9.2.1 If any of the following rules in this sub-section (9.2) is violated, the bridge will not be approved for load testing and will not be eligible for awards in any category.

9.2.2 The back span is the part of the bridge that has supports at both ends. The back span must span the river completely without touching it. The river is twelve feet wide. See the Site Plan on the Site and Bridge Diagram.

9.2.3 The cantilever is the part of the bridge that has an unsupported end. The part of the bridge farthest from the staging yard must be a cantilever.

9.2.4 The bridge must have two surfaces on which the sides of the decking will bear. These decking support surfaces are continuous in the span direction of the bridge. See the Elevation and Section on the Site and Bridge Diagram.

9.2.5 The bridge must provide access for safely placing the decking and load.

9.2.6 The decking must not be attached or anchored to the bridge, and it must not be used to distort the bridge from its as-built condition.

9.2.7 The bridge must not be anchored or tied to the floor.

9.2.8 It must be possible to construct and load the bridge safely using the site, equipment, and floor surfaces provided by the host student organization.

Bridges and participants must accommodate local conditions.

9.3 USABILITY

9.3.1 A weight penalty will be assessed for each rule in this sub-section (9.3) that is violated, rather than for every violation of that rule. If there are multiple violations of the same rule, the penalty will be based on the largest violation.

The penalty for violation of each of the rules in this sub-section (9.3) will be an addition to the weight of the bridge determined as follows

- (1) 50 pounds for a dimensional violation of $\frac{1}{2}$ inch or less,
- (2) 150 pounds for a dimensional violation greater than $\frac{1}{2}$ inch but not exceeding 1.0 inch,
- (3) 300 pounds for a dimensional violation greater than 1.0 inch but not exceeding 2.0 inches, and
- (4) If a dimensional violation exceeds 2.0 inches, the bridge will not be approved for load testing and will not be eligible for awards in any category.

9.3.2 The bridge shall not extend more than 5'0" above the surface of the ground or river. See the Section on the Site and Bridge Diagram.

9.3.3 Parts of the bridge (including fasteners and parts that bear on the ground) must not extend beyond the vertical plane defined by the ends of the decking support surfaces at each end of the bridge.

9.3.4 The length of each decking support surface shall not exceed 17'0".

9.3.5 At every section along the full length of the bridge, each decking support surface shall be flat, level, and at least $\frac{1}{2}$ inch wide.

9.3.6 The decking support surfaces shall be smooth and free of vertical protrusions except for the fastener bolt heads that are no higher than $\frac{1}{4}$ inch.

9.3.7 The outer edges of the two decking support surfaces shall be no less than 2'6" from one another, and the inner edges of the decking support surfaces shall be no more than 3'2" apart. These dimensions are measured perpendicularly to the span of the bridge. See the Section on the Site and Bridge Diagram.

9.3.8 A gap is a discontinuity or depression that extends laterally across the full width of a decking support surface. No gap shall exceed ¼ inch measured in the span direction of the bridge.

9.3.9 The decking support surfaces shall be no more than 3'0" above the surface of the river or ground at any point. See the Section on the Site and Bridge Diagram.

9.3.10 A vehicle passageway must completely traverse the bridge from end to end. It must be at least 1'6" high measured up from the decking support surfaces, and must be at least 3'8" wide measured perpendicularly to the span of the bridge. See the Section on the Site and Bridge Diagram.

9.3.11 Vertical clearance must be provided under the bridge at all points directly over the river. The clearance must be at least 1'7" high, measured from the surface of the river. See the Elevation on the Site and Bridge Diagram.

9.3.12 Vertical clearance must be provided under the bridge for a minimum of 3'6" from the unsupported cantilever end of the decking support surfaces. The clearance must be at least 1'7" high, measured from the ground. See the Elevation on the Site and Bridge Diagram.

9.4 MEMBER-TO-MEMBER CONNECTIONS

9.4.1 Violations of the rules in this sub-section (9.4) will result in penalties being added to the weight of the bridge. The penalty for each violation is 25 pounds.

9.4.2 There shall be a connection at every place where one member contacts another, and by the end of timed construction there must be at least one fastener in every connection so that it cannot be taken apart without first turning the nut or the bolt and removing the nut from the bolt. Definitions of "member" and "fastener" are given in 10.2.3 and 10.2.4, respectively.

9.4.3 A faying surface is either of a pair of surfaces that are, or will be, in contact at a connection. Every member must have one or more faying surfaces at each connection. Faying surfaces must be flat and smooth, and must not have protrusions, ridges, studs, teeth, threads, holes (other than those for fasteners), or sockets that would lock into connecting members.

9.4.4 Every faying surface must be penetrated by a fastener.

9.4.5 The bolt must penetrate completely through a hole in each of the members that it connects. Dimension(s) of the hole must be small enough so that neither the head of the bolt nor the nut can pass through the hole.

9.4.6 The hole for a fastener shall not be threaded. It must be possible to install and remove the bolt without turning it. A nut welded to a member constitutes a threaded hole.

9.4.7 The bolt must fully engage the threads of the nut. That is, the terminal threads on the bolt must extend beyond, or be flush with, the outer face of the nut.

Section 10

MATERIAL AND COMPONENT SPECIFICATIONS

10.1 SAFETY

10.1.1 If any one of the rules in this sub-section (10.1) is violated, the bridge will not be approved for construction or load testing, and will not be eligible for awards in any category.

10.1.2 A member must not weigh more than twenty pounds. See 10.2.3 for definition of “member.”

10.1.3 A bridge must not incorporate an electric, electronic, fluidic, or other non-mechanical sensor or control system; a non-mechanical energy transmission device such as a wire, duct, or tube; an energy conversion or storage device such as an electromagnet, electric cell, motor, hydraulic or pneumatic piston, turbine, chemical reactor, pressure vessel, pre-loaded spring, or triggering device.

10.2 DURABILITY AND CONSTRUCTABILITY

10.2.1 Penalties

Violation of the rules in this sub-section (10.2) will result in penalties being added to the weight of the bridge. The penalty is 25 pounds for each member or fastener that is in violation.

10.2.2 Bridge

A bridge must be constructed only of steel members and steel fasteners. For the purposes of this competition, steel is defined as an iron alloy that is strongly attracted to the magnet provided by the host organization. Solder, brazing, and adhesives are not permitted. Exceptions: Purely decorative items such as coatings and decals are permitted, and bridge parts may be labeled.

10.2.3 Members

10.2.3.1 A member is a rigid component comprised of steel parts welded together. A member must retain its shape, dimensions, and rigidity during timed construction and load testing. Hinged, jointed, articulated, and telescoping members are prohibited, as are those with parts that move. This prohibition includes members with parts that are intended to slide, rotate, deflect, or bend relative to the member such as cams, latches, sliding pins, springs, and snap-lock devices. Also prohibited are members incorporating hinges or other devices that do not restrain rigid-body rotation or translation of one part of the member relative to another part. Exception: Deformations caused by mechanical strain (e.g., bending, stretching) during construction and load testing are not violations.

10.2.3.2 A member must not exceed overall dimensions of 3'0" x 6" x 4". That is, it must fit into a right rectangular prism (i.e., box) of those dimensions.

10.2.4 Fasteners

10.2.4.1 A fastener is a bolt that is not part of a member, with one nut that is not part of a member. Grade and diameter are not restricted. Custom fabricated bolts and nuts are prohibited. A bolt or nut that is welded to a member does not qualify as part of a fastener

10.2.4.2 The bolt in a fastener must be solid and no more than 1½-inch nominal length (bottom of head to end) with a head that is hexagonal in shape. Bolts must be commercially available and shall not be mechanically altered or modified in any way but may be painted.

10.2.4.3 The nut for a fastener must match the bolt. That is, the nominal size (inside diameter) must be the same as that of the bolt and permit the nut to be turned onto the bolt. Nuts must be solid and hexagonal in shape, and must be available commercially. Only one bolt and nothing else shall be threaded into a nut. Nuts must not be mechanically altered or modified in any way but may be painted.

Section 11

CONSTRUCTION REGULATIONS

11.1 DEFINITIONS

11.1.1 "River," "staging yard," "cofferdam," and "construction site boundary" are delineated by the Site Plan on the Site and Bridge Diagram.

11.1.2 "Ground" is the floor inside the construction site boundary, except for the river. Ground includes the cofferdam.

11.1.3 "Builders" are undergraduate or graduate student members of a competing student organization. See section 4, "Eligibility."

11.1.4 A “team” is all the builders from the competing organization who are within the construction site boundary during timed construction.

11.1.5 A “captain” is an undergraduate or graduate student member of a competing student organization. A team designates one person to serve as captain for the entire competition. The captain may or may not be a builder but will observe timed construction, repair, weighing, and load testing, and will sign data forms.

11.1.6 “Personal protective equipment” consists of a hardhat meeting ANSI standard Z89.1 and protective eyewear or safety goggles meeting ANSI standard Z87.1. A team provides its own personal protective equipment.

11.1.7 A “pouch” is an optional article of clothing that may be used to carry fasteners and tools. This definition encompasses tool belts and other accessories worn by builders and having the same function.

11.1.8 A “tool” is a device that is used to construct the bridge and is not part of the completed bridge. A team provides its own tools. Tools may be assembled during timed construction and may be powered by batteries.

11.1.9 A “temporary pier” is an optional device that bears on the cofferdam and is used to support the constructed portion of the bridge during timed construction. It has no other purpose, is not a tool, and is not part of the completed bridge. A team provides its own temporary pier, which may be made of any material.

11.1.10 “Member-to-member connection” is defined in 9.4. “Member” and “fastener” are defined in 10.2.3 and 10.2.4, respectively.

11.1.11 The “constructed portion” is comprised of members and fasteners, and is created during timed construction. The constructed portion is not required to be contiguous.

11.1.12 To “fasten” means making a member-to-member connection by installing a fastener (i.e., bolt and nut) to attach a member to the constructed portion or to attach two non-contiguous parts of the constructed portion.

11.2 GENERAL SAFETY CONDITIONS

11.2.1 Timed construction or repair will not commence or will be stopped if any provision of this sub-section (11.2) is violated.

11.2.2 Builders, captains, judges, host personnel, and spectators must not be exposed to risk of personal injury.

11.2.3 Only builders and judges are permitted within the construction site boundary during timed construction and repair. The captain, if not a builder, must observe construction and be accessible to the judges, but shall not interfere with them. Spectators, including coaches, faculty, advisers, and other associates of the team, must remain in designated areas at a distance from the construction site that assures they are not at risk and cannot interfere with the competition.

11.2.4 The team shall include no more than six builders.

11.2.5 At all times during timed construction and repair every builder must wear personal protective equipment in the proper manner (e.g., hardhat with peak in front).

11.2.6 A tool or unassembled part of a tool must not weigh more than twenty pounds, and not exceed overall dimensions of 3'0" x 6" x 4". That is, it must fit into a right rectangular prism (i.e., box) of those dimensions. Welding machines and tools requiring external power connections shall not be used during timed construction or repair. Tools must be rigid except for rotary tools such as ratchet wrenches and battery-powered drivers.

11.2.7 There shall be no more than one temporary pier. It must retain its original dimensions, not weigh more than twenty pounds, and not exceed 1'6" in any horizontal dimension. That is, it should fit inside a vertical cylinder with diameter of 1'6".

11.2.8 Containers of lubricant shall not be in the construction site at any time.

11.3 SAFE CONSTRUCTION PRACTICES

11.3.1 If any rule in this sub-section (11.3) is violated during timed construction or repair, the judge will stop the clock and explain the violation. Before the clock is restarted, builders, tools, parts of tools, members, fasteners, and the temporary pier will be returned to the positions they occupied before the violation. Then the team will be asked to resume construction using safe procedures. A team will have the opportunity to construct its bridge safely. However, if the team is not able to construct its bridge completely using safe procedures, construction will cease and the bridge will not be approved for load testing and will not be eligible for awards in any category.

11.3.2 Construction of every non-contiguous part of the constructed portion shall commence by placing a member on the ground. That member becomes part of the constructed portion. When a member is in contact with the constructed portion it becomes part of the constructed portion.

11.3.3 Surfaces of the constructed portion that bear on the ground shall be the same surfaces that will bear on the ground in the completed bridge and, after being placed, must be in contact with the ground continuously for the remaining duration of timed construction and repair.

11.3.4 A temporary pier shall not support tools or fasteners.

11.3.5 A member that is not part of the constructed portion shall not be supported by a temporary pier unless it is simultaneously supported by a builder.

11.3.6 The temporary pier shall not be moved while it is supporting the constructed portion, nor shall a builder simultaneously touch (or touch with tools) the temporary pier and the constructed portion.

11.3.7 Throwing anything is prohibited.

11.3.8 A builder shall not cross from the ground on one side of the river to the ground on the other side or to the cofferdam. A builder shall not cross from the cofferdam to the ground adjacent to the river.

11.3.9 Outside the staging yard, a builder shall not simultaneously touch (or touch with tools) more than one member that is not part of the constructed portion.

11.3.10 A pouch or other article of clothing shall not be removed from a builder's person nor held in a builder's hand(s).

11.3.11 Nuts, bolts, and tools shall not be held in the mouths of builders.

11.3.12 A builder must not use the bridge, a constructed portion of the bridge, the temporary pier, or a tool to support the builder's body weight. For example, lying, standing, sitting, or kneeling on those objects is prohibited. However, a builder may lean on the constructed portion if the builder is kneeling on the floor on both knees, kneeling on the floor on one knee with the other foot on the floor, or standing with the heels and toes of both feet on the floor.

11.3.13 A builder must not depend on another builder or builders for support or balance.

11.4 ACCIDENTS

11.4.1 In general, the clock is not stopped when there is an "accident," i.e., an infraction of one of the provisions of this sub-section (11.4).

A time penalty is assessed for every accident. If an accident is continuous (for example, a builder stands in the river, or a dropped item is not retrieved promptly) it will be counted as multiple occurrences until corrected. Builders involved in accidents may continue to build. Items involved in accidents shall be recovered promptly and may be used.

Construction cannot depend on deliberately committing an accident. Therefore, the clock will be stopped if any work is accomplished by committing an accident. Before timed construction is resumed, builders, tools, members, temporary pier, and fasteners will be returned to the positions they occupied before the accident.

11.4.2 A builder or a builder's clothing touches the river or the floor outside the construction site boundary. Penalty is 1/2 minute (30 seconds) for every occurrence. Exception: There is no penalty for stepping out of bounds or entering the river to retrieve an object that has been dropped, such as a member, tool, nut, bolt, or personal protective equipment.

11.4.3 The temporary pier falls over or collapses while in use. Penalty is 1/2 minute (30 seconds) for every occurrence.

11.4.4 The temporary pier touches the river, the ground outside the cofferdam, or the floor outside the staging yard. Penalty is 1/4 minute (15 seconds) for every occurrence.

11.4.5 A member, constructed portion, tool, nut, bolt, or personal protective equipment touches the floor outside the staging yard, the river, or the ground (which includes the cofferdam). Penalty is 1/4 minute (15 seconds) for every item during every occurrence. Exception: The part of the constructed portion that is intended to bear on the ground may touch the ground outside the river without penalty.

11.4.6 Outside the staging yard, a member that is not part of the constructed portion touches another member that is not part of the constructed portion. Penalty is 1/4 minute (15 seconds) for every occurrence.

11.5 CONSTRUCTION SITE

11.5.1 See the Site Plan on the Site and Bridge Diagram for layout of the construction site. The host student organization lays out the site before the competition. The construction site shall be laid out so that tape that designates lines is wet or out of bounds. That is, the edges of tapes, not the centerlines, designate the lines shown on the Site Plan.

11.6 START

11.6.1 Before construction begins, only the following items are in the staging yard: the temporary pier, all members, fasteners, tools, and unassembled parts of tools. The temporary pier and every member, tool, and fastener must be in contact with the ground within assigned areas of the staging yard as designated on the Site Plan on the Site and Bridge Diagram. Builders are on the ground, which includes the cofferdam and both sides of the river. Builders start without tools and fasteners, which may be passed from one builder to another after timed construction begins. Similarly, the temporary pier is passed from builder to builder. Builders are wearing personal protective equipment as well as optional clothing such as pouches.

11.6.2 Judges inspect members, fasteners, tools, and the temporary pier as they are placed in the staging yard. Tools and temporary piers that do not conform to rules 11.2.6 and 11.2.7, respectively, shall not be used and shall be removed from the staging yard. After inspection and throughout timed construction and repair, additional members, tools, parts of tools, fasteners, temporary piers, or other items shall not be brought into the construction site nor shall anything be removed. Additional builders shall not enter the construction site after the beginning of timed construction.

11.6.3 Timing and construction begin when the captain signifies that the team is ready and the judge declares the start.

11.7 TIME

11.7.1 Time is kept from start to finish of construction. The clock will be stopped under the following conditions

- (1) if a builder, captain, or judge sees a condition that could cause injury, or
- (2) when a safety rule has been violated (see 11.2 and 11.3), or
- (3) when work has been accomplished by committing an “accident.” The clock is not stopped if the “accident” does not contribute to the construction process (see 11.4), or
- (4) if a builder, captain, or judge is injured.

11.7.2 Construction ceases while the clock is stopped. After the situation has been corrected, builders, tools, the temporary pier, and bridge components are returned to the positions they occupied before the interruption, and the clock is restarted.

11.8 TIME LIMIT

11.8.1 If construction time, not including penalties and repair time, exceeds thirty minutes, construction time will be counted as 180 minutes for scoring. “Accidents” (11.4) that occur after thirty minutes will not be penalized but safety rules (11.2 and 11.3) will still be enforced. Judges may inform the team when this time limit is approaching and must inform them when it is reached.

11.8.2 If construction time, not including penalties and repair time, exceeds 45 minutes, judges must halt construction. If local conditions allow and the head judge approves, the team may move its bridge off site for continued, untimed construction if it can be done safely. The bridge will not be eligible for awards in any category but may be load tested at the discretion of the head judge.

11.9 FINISH

11.9.1 Construction ends and the clock is stopped when

- (1) the bridge has been completed by connecting all the members that were in the staging yard at the start of timed construction,
- (2) the temporary pier is in the part of the staging yard designated on the Site and Bridge Diagram,
- (3) every tool and extra fastener is held in the hands of a builder, or is in clothing worn by a builder, or is on the ground in the part of the staging yard designated on the Site and Bridge Diagram, and
- (4) the captain informs the judge that construction is complete.

11.9.2 Installation of decking is not included in timed construction.

11.9.3 After construction is finished the bridge must not be modified except for repair as permitted by 11.10.

11.10 REPAIR

11.10.1 Before the judges inspect and measure the bridge, and before the bridge is moved from the construction site, two builders, or one builder and the captain, will be given one opportunity to inspect the bridge and plan any needed repairs. They will be given five minutes to accomplish this. They shall not modify the bridge, and they shall not touch the bridge except as necessary to use measuring devices. Following this inspection, builders will be permitted, but not required, to repair construction mistakes found by their inspectors. Repairs are made with the clock restarted and begin with builders and necessary items arranged in the staging yard as prescribed by 11.6.1. Safety precautions (11.2 and 11.3) are enforced and accidents (11.4) are counted. The repair period ends when the conditions listed in 11.9.1 are fulfilled and shall not be resumed. Judges will not inspect the bridge prior to the end of the repair period.

If builders commence repairs, the scoring spreadsheet will increase construction time by the sum of two minutes plus double the time required to make repairs, including any time penalties assessed during the repair period.

It is not necessary to inspect, measure, or repair a bridge that exceeded the 45-minute time limit prescribed in 11.8.2.

11.10.2 If the repair time, not including penalties, exceeds five minutes, judges must halt construction. If local conditions allow, and the head judge approves, the team may move its bridge off site for continued, untimed construction if it can be done safely. The bridge will not be eligible for awards in any category but may be load tested at the discretion of the head judge.

Section 12

LOAD TESTS

12.1 SAFETY PRECAUTIONS

An activity will be halted if the judge considers it to be hazardous.

A bridge could suddenly collapse or sway in any direction during load tests. Therefore, the number of people near the bridge while it is being tested shall be minimized. Usually, the load should be placed on the bridge by only two competitors. Competitors who are not participating in loading, faculty, advisers, and other spectators must observe from an area designated by the judges and host student organization.

People should be kept clear of the unsupported end of the cantilever; load should be placed from the sides;

While participating in load testing, competitors must wear hardhats meeting ANSI standard Z89.1, protective eyewear or safety goggles meeting ANSI standard Z87.1, gloves, and leather construction boots. This safety equipment is provided by the competitors. Judges will not permit load testing by competitors who are not wearing the specified safety equipment or are wearing it improperly.

During testing, safety supports must be in place below the decking. The safety supports shall be of sufficient height, strength, number, and extent that none of the load will fall more than approximately five inches if the bridge collapses.

All preparations for load testing, including placement of safety supports, must be completed before any load is on the bridge so that it will not be necessary for anyone to reach, crawl, or step under the loaded bridge. However, if safety supports must be adjusted during loading, the load must first be removed without disturbing the bridge, adjustments made, and the load replaced as it was before being removed.

If team members cannot load their bridge safely, loading will cease and the bridge will not be eligible for awards in any category.

Do not exceed 400 psf uniform load or 500 pounds concentrated load on the decking.

12.2 DAMAGE

A bridge will not be tested in a condition that compromises its strength or stability.

If a bolt or nut is missing or the threads of a nut are not fully engaged, the fastener will be reinstalled correctly, and a penalty of \$1,000,000 will be added to the Construction Economy score for every bolt and every nut that was reinstalled.

A bridge with damage that would reduce its strength or stability (such as a fractured weld, or missing or broken member) will not be approved for load testing and is not eligible for awards in any category. Repair and modifications are not permitted after the end of timed construction and repair except as provided by the preceding paragraph of this subsection (12.2).

12.3 PREPARATION

The captain must observe the load tests.

The temporary pier is not used during load tests.

The judge designates the “A” side of the bridge by a random process. The “B” side is opposite to the “A” side.

Teams must accept imperfect field conditions such as bent decking, sloping floors, and unfavorable floor surfaces.

At their discretion, judges may impose a penalty for a bridge that incorporates parts having the primary function of interfering with placement of targets, decking, load, or measuring devices. If the bridge cannot be loaded safely, or sway or deflection cannot be measured in accordance with the provisions of this section (12), the bridge will not be load tested and will not be eligible for awards in any category.

12.4 LATERAL LOAD TESTS

12.4.1 The provisions of this sub-section (12.4) are illustrated by the Lateral Loading Diagram. “Sway” is translation in any horizontal direction.

The lateral load tests are conducted with one unit of decking placed at the center of the back span and approximately 75 pounds of weight on the decking near the “B” side of the bridge. This load is intended to prevent the bearing surfaces of the bridge from lifting off the floor when lateral load is applied.

Bearing surfaces are prevented from sliding by lateral restraint applied by team members or the captain. This lateral restraint does not restrain rotation or uplift. The restraint is applied as close to the ground as possible, at the locations shown on the Lateral Loading Diagram. Teams may provide and use optional devices to prevent sliding. A lateral load test is failed if the bridge is restrained in other than the lateral direction, or if the restraint is not applied close to the ground, or if the restraint is not effective.

12.4.2 Lateral Load Test of the Back Span

A sway target is established for measurement on the “A” side of the bridge, 6’6” from the end of the decking support surface at the end of the bridge that is not cantilevered. The sway target is located as close as possible to the decking support surface, which is at the same level as the bottom of the decking.

Apply a 50-pound lateral pull and measure the sway. The pulling force is located as close as possible to the decking support surface and not more than four inches from the sway target. To pass the lateral load test, the sway must not exceed 1/2 inch.

If the bridge does not pass this lateral load test it is not approved for further testing. **Do not conduct any other load test.** Check the appropriate box on the judges’ data form. The spreadsheet will add penalties of \$20,000,000 to the Construction Economy score and \$40,000,000 to the Structural Efficiency score when the judging data is entered.

If the bridge passes the lateral load test of the back span, proceed with the lateral load test of the cantilever.

12.4.3 Lateral Load Test of the Cantilever

A sway target is established for measurement on the “A” side of the bridge, at the end of the decking support surface at the unsupported end of the cantilever. The sway target is located as close as possible to the decking support surface, which is at the same level as the bottom of the decking.

Apply a 50-pound lateral pull and measure the sway. The pulling force is located as close as possible to the decking support surface and not more than four inches from the sway target. To pass the lateral load test, sway must not exceed 1/2 inch.

If the bridge does not pass this lateral load test it is not approved for further testing. **Do not conduct any other load test.** Check the appropriate box on the judge’s data form. The spreadsheet will add penalties of \$20,000,000 to the Construction Economy score and \$40,000,000 to the Structural Efficiency score when the judging data is entered.

If the bridge passes this lateral load test, remove the load and decking, and proceed with the vertical load test.

12.5 VERTICAL LOAD TESTS

12.5.1 The provisions of this section are illustrated by the Vertical Loading Diagram.

Safety supports are placed under the decking so that no portion of the load will drop more than approximately five inches if the bridge collapses.

Decking units are three feet long in the longitudinal (span) direction of the bridge. Place one decking unit at a distance M from the end of the decking support surfaces at the end of the bridge that is not cantilevered. M is determined at the beginning of the competition as described by Table 8.1 in section 8, "Schedule of Competition." Place the other decking unit at a distance of one inch measured from the end of the decking support surfaces at the unsupported end of the cantilever. Decking units are placed square with the bridge and centered laterally with the main bars spanning laterally over the decking support surfaces. Decking units must not be attached to the bridge and must not distort it (see 9.2.5 and 9.2.6).

Three targets are established for measuring vertical deflections at locations determined by the following dimensions

- TB from the end of the decking support surface at the end of the bridge that is not cantilevered, on the "B" side of the bridge
- TC from the end of the decking support surface at the cantilevered end of the bridge, on the "A" side of the bridge
- One inch from the end of the decking support surface at the cantilevered end of the bridge, on the "B" side of the bridge.

TB and TC are determined at the beginning of the competition as described by Tables 8.1 and 8.2 in section 8, "Schedule of Competition." Vertical deflection targets are located on the decking.

Position measuring devices on the three vertical deflection targets.

Uniformly distribute 100 pounds of preload on the decking unit on the back span. Then uniformly distribute 50 pounds of preload on the decking unit on the cantilever. Preloads are laterally centered on the decking units. Preloads are distributed and aligned identically for every bridge.

If, after the preload is installed, decking does not contact the decking support surface at a vertical deflection target, the judge will clamp the decking to the decking support surface at that location and leave the clamp in place during vertical load testing.

If a competitor disturbs a measuring device after it has been initialized and before loading is completed and all measurement have been recorded, the judge will require the team to disassemble the bridge and repeat timed construction beginning with the initial conditions prescribed in 11.6. Scoring will be based on the run that results in the larger construction cost, C_c (not including load test penalties), but will not exceed 125% of C_c (not including load test penalties) for the initial run.

The two steps (increments) of vertical loading produce four measurements

- (1) DB1 = absolute value of vertical deflection at the target on the “B” side of the back span that occurs during step 1 (loading the back span).
- (2) DCA = absolute value of vertical deflection at the target on the “A” side of the cantilever that occurs during step 2 (loading the cantilever with the load from step 1 remaining in place).
- (3) DCB = absolute value of vertical deflection at the target on the “B” side of the cantilever that occurs during step 2 (loading the cantilever with the load from step 1 remaining in place).
- (4) DB2 = absolute value of vertical deflection at the target on the “B” side of the back span that occurs from the beginning of step 1 to the end of step 2.

The scoring spreadsheet computes aggregate deflection as the sum of DCA, DCB, and the larger of DB1 and DB2.

12.5.2 Step 1 – Vertical Load Test of the Back Span

Load the decking unit on the back span and measure the deflection, using the following procedure

- (1) The two preloads remain in place.
- (2) Initialize the sway measurement device on the back span.
- (3) Initialize the sway measurement device on the cantilever.
- (4) Initialize the vertical deflection measuring device on the back span or record the initial reading.
- (5) Team members place 1400 pounds of additional load on the decking unit on the back span. The load is laterally centered on the decking unit and is distributed over the length of the decking unit as uniformly as possible at all times during loading. Load is distributed and aligned identically for every bridge. Load shall be placed at a steady pace, without hesitation.
- (6) As the load is being placed, observe the deflection target on the back span and both sway targets. Stop loading if
 - (a) sway at either sway target exceeds 0.5 inch from the beginning of step 1, or
 - (b) deflection at the deflection target on the back span exceeds three inches downward from the beginning of step 1, or
 - (c) decking or any part of the bridge, other than the intended bearing surfaces, comes to bear on a safety support or the floor, or
 - (d) a decking unit or some of the load falls off the bridge, or
 - (e) the bridge collapses or a dangerous collapse is imminent, in the opinion of the judge.

If loading is stopped for any of the situations a, b, c, d, or e, the bridge is not approved for further load testing and is not eligible for awards in any category. Remove the load and **do not continue load testing**. Check the appropriate box on the judge's data form.

If the bridge passes step 1, record the measured value DB1. If DB1 exceeds 1.5 inches, the scoring spreadsheet will add penalties of \$8,000,000 to the Construction Economy score and \$20,000,000 to the Structural Efficiency score.

12.5.3 Step 2 – Vertical Load Test of the Cantilever

Load the decking unit on the cantilever and measure the deflections, using the following procedure

- (1) The two preloads and the load from step 1 remain in place.
- (2) Do **not** initialize the vertical deflection measuring device on the back span.
- (3) Do **not** initialize the sway measurement devices on the back span and cantilever.
- (4) Initialize the vertical deflection measuring devices on the cantilever.
- (5) Team members place 950 pounds of additional load on the decking unit on the cantilever. The load is laterally centered on the decking unit and is distributed over the length of the decking unit as uniformly as possible at all times during loading. Load is distributed and aligned identically for every bridge. Load shall be placed at a steady pace, without hesitation.
- (6) As the load is being placed, observe the three deflection targets and both sway targets. Stop loading if
 - (a) sway at either sway target exceeds 0.5 inch from the beginning of step 1, or
 - (b.1) deflection at the deflection target on the back span exceeds three inches downward from the beginning of step 1, or
 - (b.2) deflection at either deflection target on the cantilever exceeds two inches downward from the beginning of step 2, or
 - (c) decking or any part of the bridge, other than the intended bearing surfaces, comes to bear on a safety support or the floor, or
 - (d) a decking unit or some of the load falls off the bridge, or
 - (e) the bridge collapses or a dangerous collapse is imminent, in the opinion of the judge.

If loading is stopped for any of the situations a, b.1, b.2, c, d, or e, the bridge is not approved for further load testing and is not eligible for awards in any category. Remove the load and **do not continue load testing**. Check the appropriate box on the judge's data form.

If the bridge passes step 2, record the measured values of DB2, DCA, and DCB. If DB2 exceeds 1.5 inches but DB1 did not, or If DCA or DCB exceeds one inch, the scoring spreadsheet will add penalties of \$6,000,000 to the Construction Economy score and \$15,000,000 to the Structural Efficiency score.

12.6 Unloading

Remove all load from the cantilever before removing any load from the back span.

If the bridge collapses during unloading (situation c, d, or e), it will not be eligible for awards in any category.

Section 13

EQUIPMENT PROVIDED BY HOST

13.1 SOURCES OF INFORMATION

The Competition Guide at <http://www.nssbc.info> should be reviewed by judges, host personnel, and competitors. It has detailed descriptions and illustrations of contest procedures and hosting equipment. The following provisions of this section (13) describe some of the equipment that is needed for the competition and is intended to help competitors know what to expect. Competitors should acquire similar equipment for use in practice and testing before the competition.

13.2 FLOOR

The floor in both the construction site and loading area shall be solid, stable and as nearly flat and level as possible.

13.3 LATERAL LOAD DEVICE

The lateral load device should be capable of applying a force of 50 pounds in the horizontal direction.

13.4 SWAY MEASUREMENT

Sway is horizontal translation and is measured at two points by any accurate method. A suggested method is to suspend a plumb bob from the sway target and measure sway from a point marked on the floor.

13.5 DEFLECTION MEASUREMENT

Deflection is vertical translation and is measured at three points by any accurate method.

13.6 DECKING

Preferred decking is steel bar grating identified as W-19-4 (1 x 1/8). The dimensions of a unit of grating are approximately 3'6" x 3'0" x 1" and the weight is approximately fifty pounds. However, the host may provide a different type of decking with approximately the same dimensions. Grating has significant bending strength only in the direction of the main bars, which are 3'6" long. The grating will be installed with the main bars perpendicular to the length of the bridge, creating a roadway that is 3'6" wide. Therefore, support for the grating is needed for the edges that are parallel to the length of the bridge but not for the edges that are perpendicular to the length.

13.7 CLAMPS AND SMALL STEEL PLATES

Clamps may be needed to hold the decking in contact with the decking support surfaces of a bridge. Small steel plates may be needed as bearing surfaces for clamps and measuring devices.

13.8 SAFETY SUPPORTS

The safety supports must be used during load tests and are intended to limit the consequences of a bridge collapsing. The safety supports shall be of sufficient height, strength, number, and extent so that none of the load will fall more than approximately five inches if the bridge collapses. Safety supports may be steel, nested stacks of plastic buckets, timbers, sand bags, or masonry units.

13.9 LOAD

A total load of 2500 pounds should be supplied in uniform pieces of size and weight that can be handled safely. When in place, the load should not provide significant stiffness in the longitudinal direction of the bridge. The recommended load consists of 25-pound lengths of 5" x 5" x 5/16" steel angle placed perpendicular to the length of the bridge. Sacks of material, containers of liquid, concrete blocks, or jacking systems could be used. Decking is not included as part of the 2500 pound load.

13.10 OFFICIAL SCORING SPREADSHEET AND DATA FORMS

Results will not be official until the completed official scoring spreadsheet is submitted to ssbc.results@gmail.com to report outcomes. It may be downloaded at <http://www.nssbc.info>. Judges' forms for recording data are accessed from the spreadsheet. The host student organization retains the judges' data forms for two weeks after the competition.

Section 14

INTERPRETATION OF RULES

The web site <http://www.aisc.org/steelbridge> lists clarifications of the rules. Competitors, judges, and host personnel may submit questions via a form on that web site but should **first read the previously posted clarifications, reread this Rules document carefully in its entirety, and review the Competition Guide** at <http://www.nssbc.info>. Submitters' names and affiliations must accompany clarification requests and will be posted with the questions and answers. Internet deliberation by the SSBC Rules Committee typically requires one to two weeks but possibly longer. Questions must be submitted before 5:00 PM Eastern Daylight Saving Time, May 13, 2013.

Section 15

JUDGING

The host student organization will recruit judges. Judges are empowered to halt any activity that they deem to be hazardous. Judges have full authority over conduct of the competition and interpretation of the rules. Decisions, scoring, and ranking are the sole responsibility of the judges and will be final. The host student organization will assure that the judges are fully informed of the Rules and procedures, and fully equipped for their tasks. More information for host organizations and judges is available at <http://www.aisc.org/steelbridge> and at <http://www.nssbc.info>, where the official scoring spreadsheet may be downloaded and the Competition Guide reviewed.

Section 16

APPEALS

16.1 CONFERENCE COMPETITIONS

16.1.1 At the beginning of the competition each team will identify its captain. The host organization will identify the conference head judge (CHJ).

16.1.2 A penalty, decision, measurement, score, or condition of competition may be appealed only by the team captain and only to the CHJ. The CHJ will not hear the appeal if he or she is approached by students other than the team captain. The CHJ will refuse to hear protests regarding bridges other than the captain's. The appeal must be made as soon as possible after the situation becomes apparent. The CHJ will hear the appeal as soon as possible and may interrupt the competition. If the captain does not consent to the decision of the CHJ, he or she shall write an explanation on the judge's data sheet before signing it. Participants are reminded that civility and ethical behavior are expected during the competition and particularly concerning appeals.

16.1.3 After the conference competition, the team captain has the option to appeal the decision of the CHJ by e-mail to Ms. Maria Mnookin <mnookin@aisc.org> or by letter to Ms. Mnookin (AISC, Suite 700, One E. Wacker Dr., Chicago, IL 60601-2001). The e-mail message or letter shall include

- (1) name of the college or university making the appeal,
- (2) captain's name, e-mail address, postal address, and telephone number,
- (3) faculty adviser's name, e-mail address, postal address, and telephone number,
- (4) brief description of the problem, including citation of pertinent rules,
- (5) action taken at the competition to deal with the problem,
- (6) action that the appealing team feels should have been taken,
- (7) data showing that the team should have qualified for national competition, and
- (8) captain's signature (letter only).

The SSBC Rules Committee may ask the host student organization to provide judges' data forms documenting the problem.

16.1.4 Appeals must be made by e-mail or letter. An appeal will be considered only if the e-mail is received or the letter is postmarked by 5:00 PM Eastern Daylight Saving Time on the Wednesday immediately after the conference competition. Ms. Mnookin will forward the appeal to the SSBC Rules Committee for their evaluation. The Committee will not respond to an appeal until the official scoring spreadsheet for that conference has been submitted by the host organization to ssbc.results@gmail.com. The only redress that may be made is an invitation to participate in the national competition if the Committee is convinced that the appeal is valid and that the appealing team should have qualified for the national competition. Decisions and rankings made by conference judges will not be overturned.

16.2 NATIONAL COMPETITION

16.2.1 Judges will refuse to hear protests from a team concerning any bridge other than their own.

16.2.2 A penalty, decision, measurement, score, or condition of competition may be appealed only by a team captain and only to the station head judge (SHJ). The SHJ will not hear the appeal if he or she is approached by students other than the team captain. The appeal must be made as soon as possible after the situation becomes apparent and before the conditions at issue are changed (e.g., by further construction, loading, or disassembly of the bridge). The SHJ will hear the appeal as soon as possible and will make a ruling. The conditions at issue will not be changed during deliberation. Participants are reminded that civility and ethical behavior are expected during the competition and particularly concerning appeals.

16.2.3 After hearing the SHJ's ruling, the team captain may request a five-minute recess to discuss the issue with the team. During the recess, the conditions at issue will not be changed. Immediately after that recess, if the team has justification to contest the SHJ's ruling, the captain has the option to appeal that decision to the national head judge (NHJ). The NHJ will hear the appeal as soon as possible and will make a ruling. The NHJ may consult with the SSBC Rules Committee. The conditions at issue will not be changed during deliberation.


16.2.4 If the team has justification to contest the NHJ's ruling, the team captain has the option to appeal that decision directly to the SSBC Rules Committee within fifteen minutes after hearing the NHJ's ruling. The Committee may request information from the NHJ and SHJ but those judges will not vote on the final ruling.

16.2.5 The decision of the SSBC Rules Committee is final; there are no further appeals. However, AISC and ASCE welcome written suggestions for improving future competitions.

Section 17

INDEX OF DEFINITION


Accident 11.4
Aggregate deflection 12.5.1
Back span 9.2.2
Builder 11.1.3
Cantilever 9.2.3
Captain 11.1.5
Clearance 9.3.11, 9.3.12
Cofferdam 11.1.1
Conference participation 4.4
Constructed portion 11.1.11
Construction cost 7.2.6
Construction economy 7.2.6
Construction site boundary 11.1.1
Construction speed 7.2.3
Data form 7.1, 13.10
DB1, DB2, DCA, DCB 12.5.1
Decking 13.6
Decking support surface 9.2.4
Deflection 13.5
Display 7.2.2
Fasten 11.1.12
Fastener 10.2.4
Faying surface 9.4.3
Fully engaged 9.4.7
Gap 9.3.8
Good standing 4.4
Ground 11.1.2
Guest team 4.2.2
Judge 15
Judges' data form 7.1, 13.10
Lateral load device 13.3
Lateral restraint device 12.4.1
Lightness 7.2.4
Load 13.9
M 8, 12.5.1
Member 10.2.3
Member-to-member connection 9.4
Official scoring spreadsheet
7.1, 7.3, 13.10
Overall performance 7.2.8
Passageway 9.3.10
Personal protective equipment
11.1.6
Pouch 11.1.7
Preload 12.5.1
Repair 11.10
River 11.1.1
S1, S2 8
Safety 6, 9.2, 10.1, 11.2, 11.3, 12.1
Safety supports 13.8
Staging yard 11.1.1
Steel 10.2.2
Stiffness 7.2.5
Structural cost 7.2.7
Structural efficiency 7.2.7
Sway 12.4.1, 13.4
TB, TC 8, 12.5.1
Team 4.2.3, 4.3.5, 11.1.4
Temporary pier 11.1.9
Tool 11.1.8

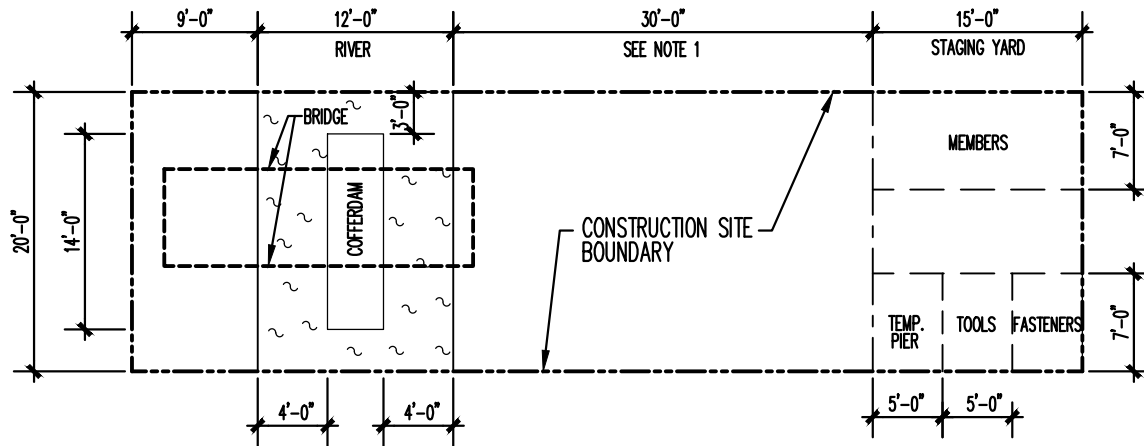


NOTES:

1. LENGTH CAN BE ADJUSTED TO FIT SITE CONDITIONS.
2. BRIDGE SHALL ACCOMODATE DECKING THROUGHOUT OVERALL LENGTH OF THE BRIDGE.
3. NO PART OF THE BRIDGE SHALL EXTEND BEYOND DECKING SUPPORT SURFACES (AT BOTH ENDS).

SITE PLAN – REFER TO CHAPTERS 9 & 11

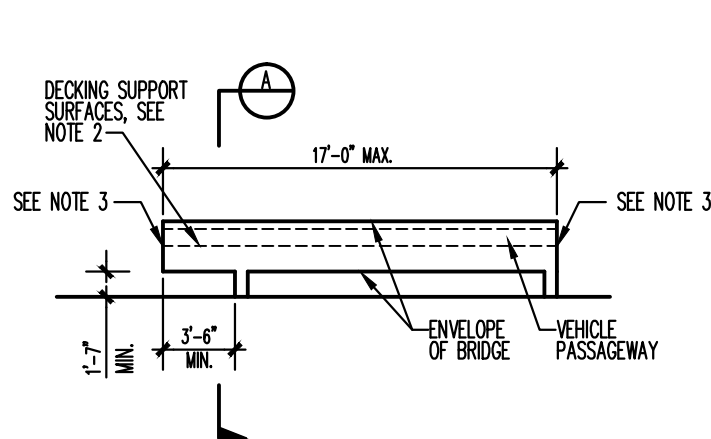


ELEVATION – REFER TO CHAPTER 9

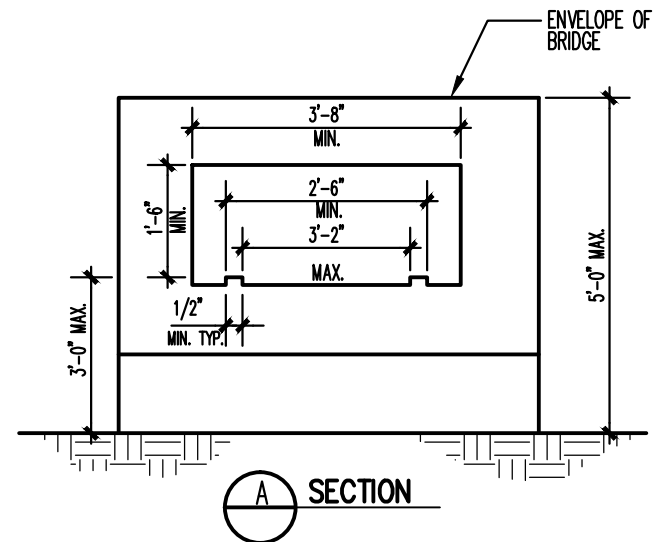


A SECTION

										DESIGNED BY F. HATFIELD	 ASCE-AISC STUDENT STEEL BRIDGE CONTEST	CONTACT NUMBER DRAWING NO. DWG 1 SCALE NTS SHEET NO.
										DRAWN BY D. SEPULVEDA		
										CHECKED BY RULES COMM.	SUBMITTED APPROVED	
										BY CHANGE N. GAVLIN		
										DATE 08-01-2012	MEMBER American Society of Civil Engineers	
REV.	BY	DATE	APP.	REC. NO.	EXPOS.	SEAL HOLDER	2012 SSBRC RULES		DESCRIPTION			

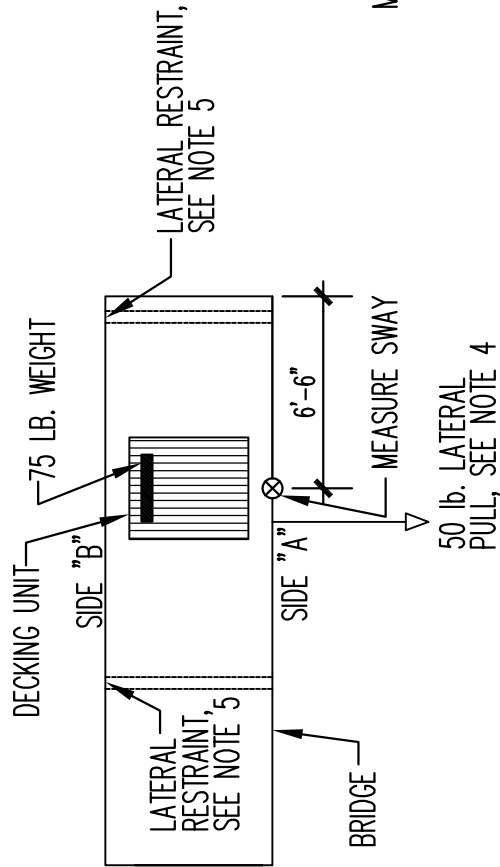

STEP 1

REFER TO 12.4.2

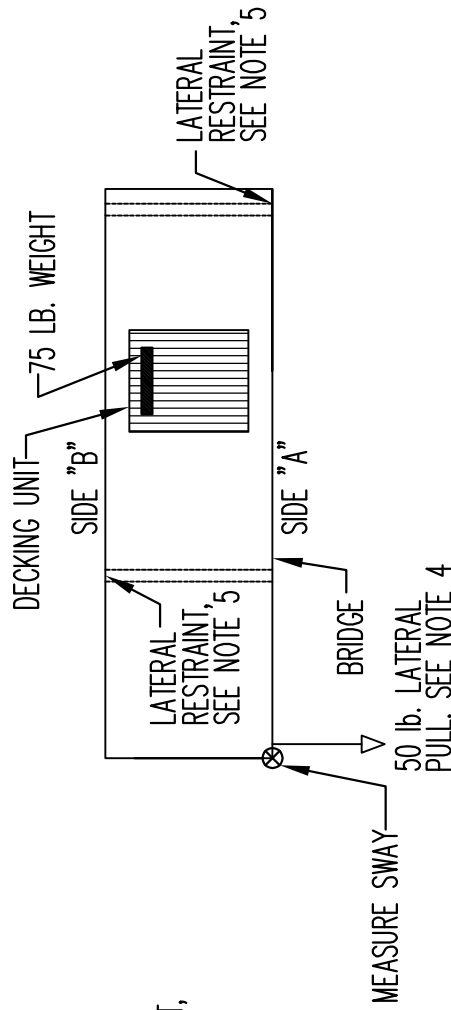

STEP 2

REFER TO 12.4.3

LATERAL LOAD TESTS

REFER TO 12.4

NOTES

1. SAFETY SUPPORTS TO BE IN PLACE UNDER THE LOAD AND TO REMAIN AT ALL TIMES DURING LOADING.
2. ALL LOADING SAFETY PROCEDURES TO BE FOLLOWED
3. ALL SWAY TARGETS ARE TO REMAIN IN PLACE THROUGHOUT LOADING PROCESS.
4. LOCATION OF 50 lb. PULL SHALL NOT EXCEED 4" FROM SWAY TARGET.
5. LATERAL RESTRAINT MUST BE APPLIED CLOSE TO THE GROUND AND MUST NOT RESTRAIN ROTATION, UPLIFT, OR TRANSLATION IN OTHER THAN THE LATERAL DIRECTION.



ASCE - ASCE
STUDENT STEEL BRIDGE CONTEST

LATERAL LOADING
DIAGRAM

CONTRACT NUMBER
DRAWING NO. DWG 2
SCALE NTS
SHEET NO.

DESIGNED BY F. HAIFELD
DRAWN BY D. SEPULVEDA
CHECKED BY RULES COMM.
IN CHARGE N. GAVLIN
DATE 08-01-2012

REV.	BY	DATE	APP.	EXP.	DESCRPTION

SEAL NUMBER
2012 ASCE RULES

